

## Electrical Protections Theory

**Electrical protection** – device controlling power system part operation (G, T, V) = *protected object*, to ensure normal operation

**Protected object** – physical device for el. energy transmission, function characterized by current values of measurable physical quantities = *state quantities* (U, I, P, Q, f, T, F,...)


**Protection operation** – it receives information about quantities (CT, VT, sensors), executes them and evaluates normal operation and inadmissible values limits.

The protected device is switched off from the supplies in case of protected object failure state → accident preventing or failure consequences reducing. Also sending signals about action for the operator.

**Failure** – object physical change (quantities) object state out of the normal state, dangerous

**Failure quantity** – causes the failure,  $u_2(t)$

**Output quantities  $y(t)$**  – high values U, I → protections connected to the CT, VT secondary circuits with a treatable signals level

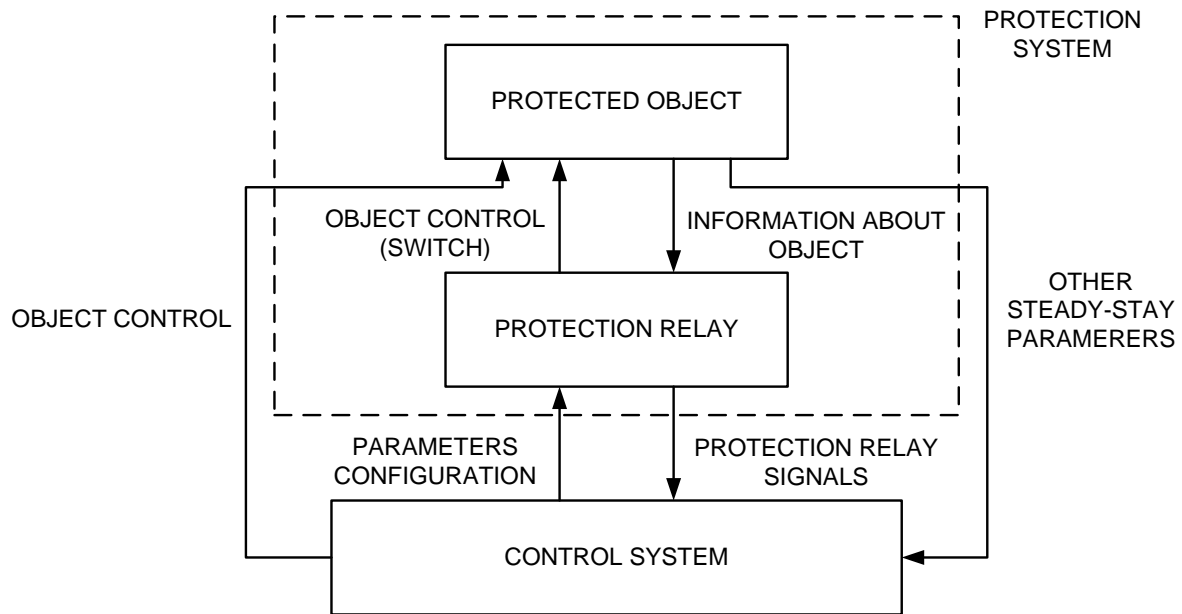

## Electrical protections - definitions

**Protection operation** – information evaluation about the object state  $x(t)$  and during the failure activity on the object by its output  $v(t)$ , i.e. failure consequences reducing or preventing from them

**Protection input  $y(t)$**  – prot. object measured outputs

**Protection output  $v(t)$**  – protection activity on the object

**Signal** – quantity announcing protection operation

**Protection algorithm F** – protection function description, relation between inputs and outputs

**Protection characteristic** – algorithm graphic interpretation

**Protection equation** – algorithm mathematical form

$$v(t) = F[y(t), n]$$

**Protection parameters** – constants for setting F

**Protection sensitivity** – the measured quantity smallest value (element  $y(t)$ ) to activate the protection

**Protection adjustability** – the range of all possible protection sensitivities

**Protection resolution** – ability to distinguish two close object states (failure and non-failure), their minimal deviation

**Protection holding ratio** – input state quantities ratio during returning to the block position and during the run to the acting position

$$\frac{x_i(t)_{return}}{x_i(t)_{pitch}} < 1$$

**Protection activity time  $t_p$**  – time from the failure origin to a signal sending to the protection output

**Protection overload capacity** – protection input max. value not endangering the protection

**Protection consumption** – electric input necessary for the protection operation

**Primary protection** – it works without instrument transformers

**Secondary protection** – connected to CT, VT secondary circuits

**Protection item** – building element (relay, TRF, electromagnet, chip, processor, connector,...)

**Protection element** – set of items creating a function unit

**Basic protection** – basic object equipment

**Reserve protection** – delayed activity in comparison with the basic one, ev. other algorithm, for a higher safety

## Failure states

### **Short-circuit**

- phase-to-phase or phase-to-ground connection
- → possible electrical, heat, mechanical damaging, loss of synchronism

### **Overload**

- too high current (power) through a device
- → heat, mechanical damaging

### **Overvoltage**

- voltage over a permitted limit
- → insulation damaging and aging, additional losses, short-circuit danger
- atmospheric or switch influences, voltage regulation, capacitive load, no-load powerline

### **Undervoltage**

- voltage dip under a permitted limit
- current loading, voltage regulation

### **Frequency decrease**

- consumption surplus over production in ES
- → incorrect function, higher magnetizing currents and losses

## **Frequency increase**

- production surplus over consumption in ES
- → incorrect function, mech. stress

## **Unbalanced load**

- single-phase load, el. traction
- → negative current component → additional losses in rotor, heating

## **Ground fault**

- single-phase-to-ground connection in networks with insulated neutral point
- subsequent short-circuit probability

## **Power reverse flow**

- turbine failure → steam input closing → motor operation

## **Loss of excitation**

- exciting current drop under static stability limit → asynchronous operation
- → additional eddy current losses

## Electrical protections sorting

- a) according to protected object type  
generator, motor, transformer, busbar,  
powerline, cable, switch, etc.
- b) according to fault type  
short-circuit, overload, undervoltage,  
overvoltage, under-, over-frequency,  
ground fault, reverse power flow,  
excitation loss, unbalance
- c) according to functional principal  
see above
- d) according to time activity
  - momentary – activity time is limited  
only by information processing and  
protection reaction, i.e. it acts  
“immediately”
  - dependent – activity time is  
proportional to the measured quantity
  - time independent – constant activity  
time (adjustable)
- e) according to construction
  - electromechanical – relay elmag.,  
inductive, heat, eldynamic,...
  - transistor – semiconductor elements  
(diodes, transistors, integr. circuits)
  - digital – discrete processing

## Requirements for protections

### **a) Speed**

Given by the activity time = protection time + switch activity. Speed choice depends on the fault type (short-circuit x overload).

### **b) Selectivity**

Disconnecting as small as possible system part. Time, current, or place scaling.

### **c) Sensitivity and precision**

Measured quantity minimal value reacted by the protection and its relative error.

### **d) Reliability**

The ability to act during the fault and not to act if no fault. External conditions, protection mechanism, maintenance influence. Backup.

### **e) Easy maintenance and check-up**



# Generator protections

## Protections against short-circuits and ground faults


Serious faults → to ensure machine switching off.

### **Differential protection (DP)**


Longitudinal DP – compares object input and output (more often)

Cross DP – compares two objects inputs, i.e. protects two same objects operating in parallel


Longitudinal DP – activity in case  $i_R > i_{set} = 10x \% I_n$ , complete immediate switching-off

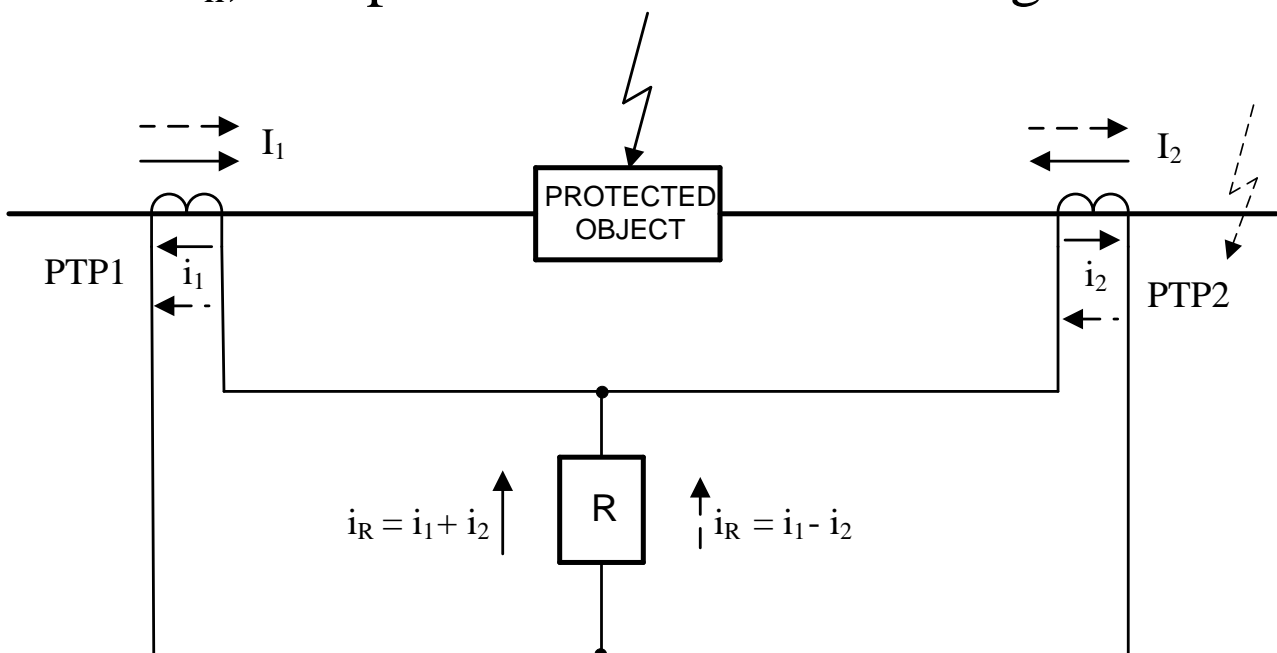


# CT inaccuracy compensation

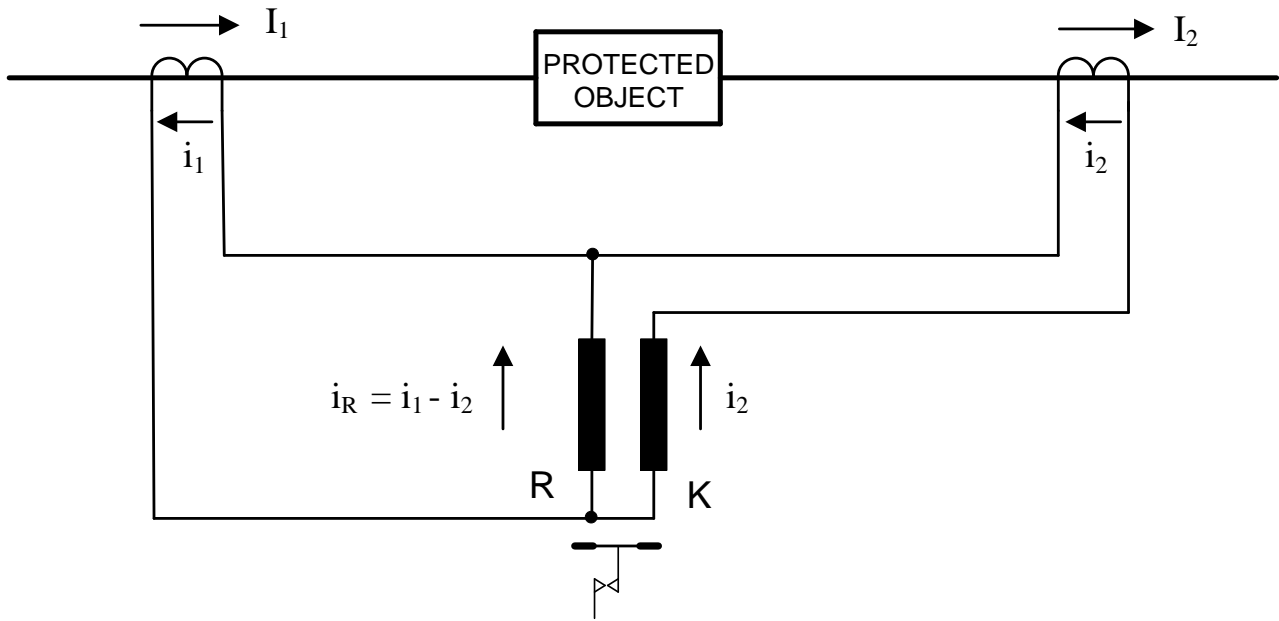


# 3ph DP at generator

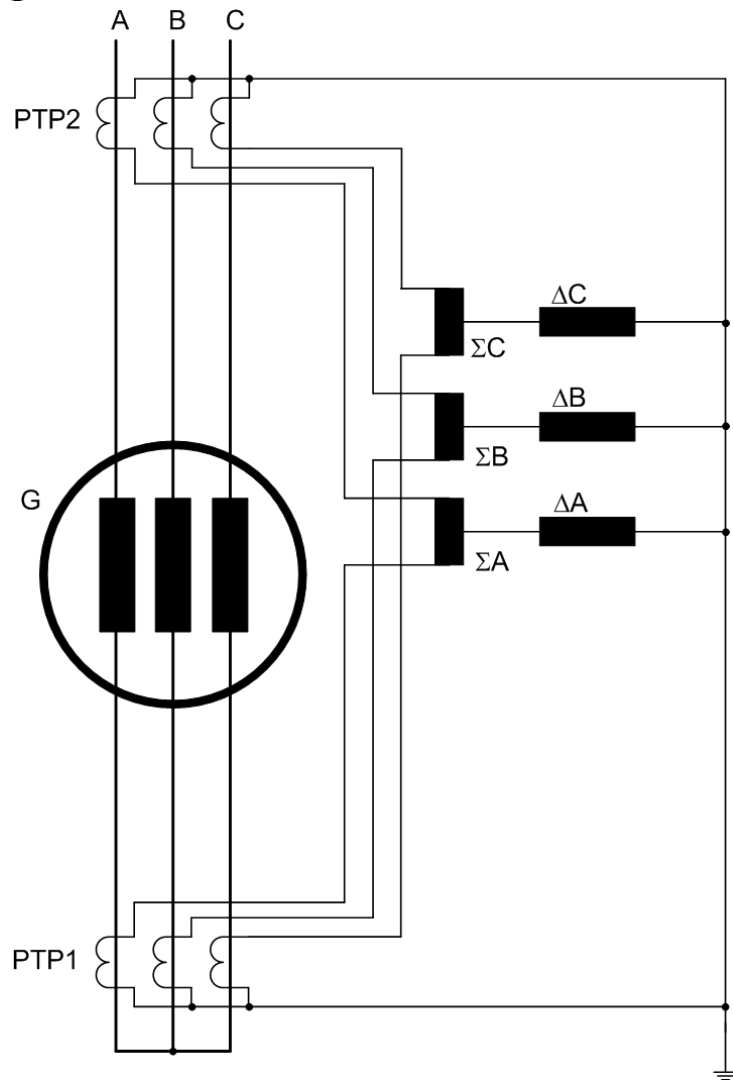


Longitudinal DP for block  $R_B$  in „three-point connection“ – as the  $R_G$  backup

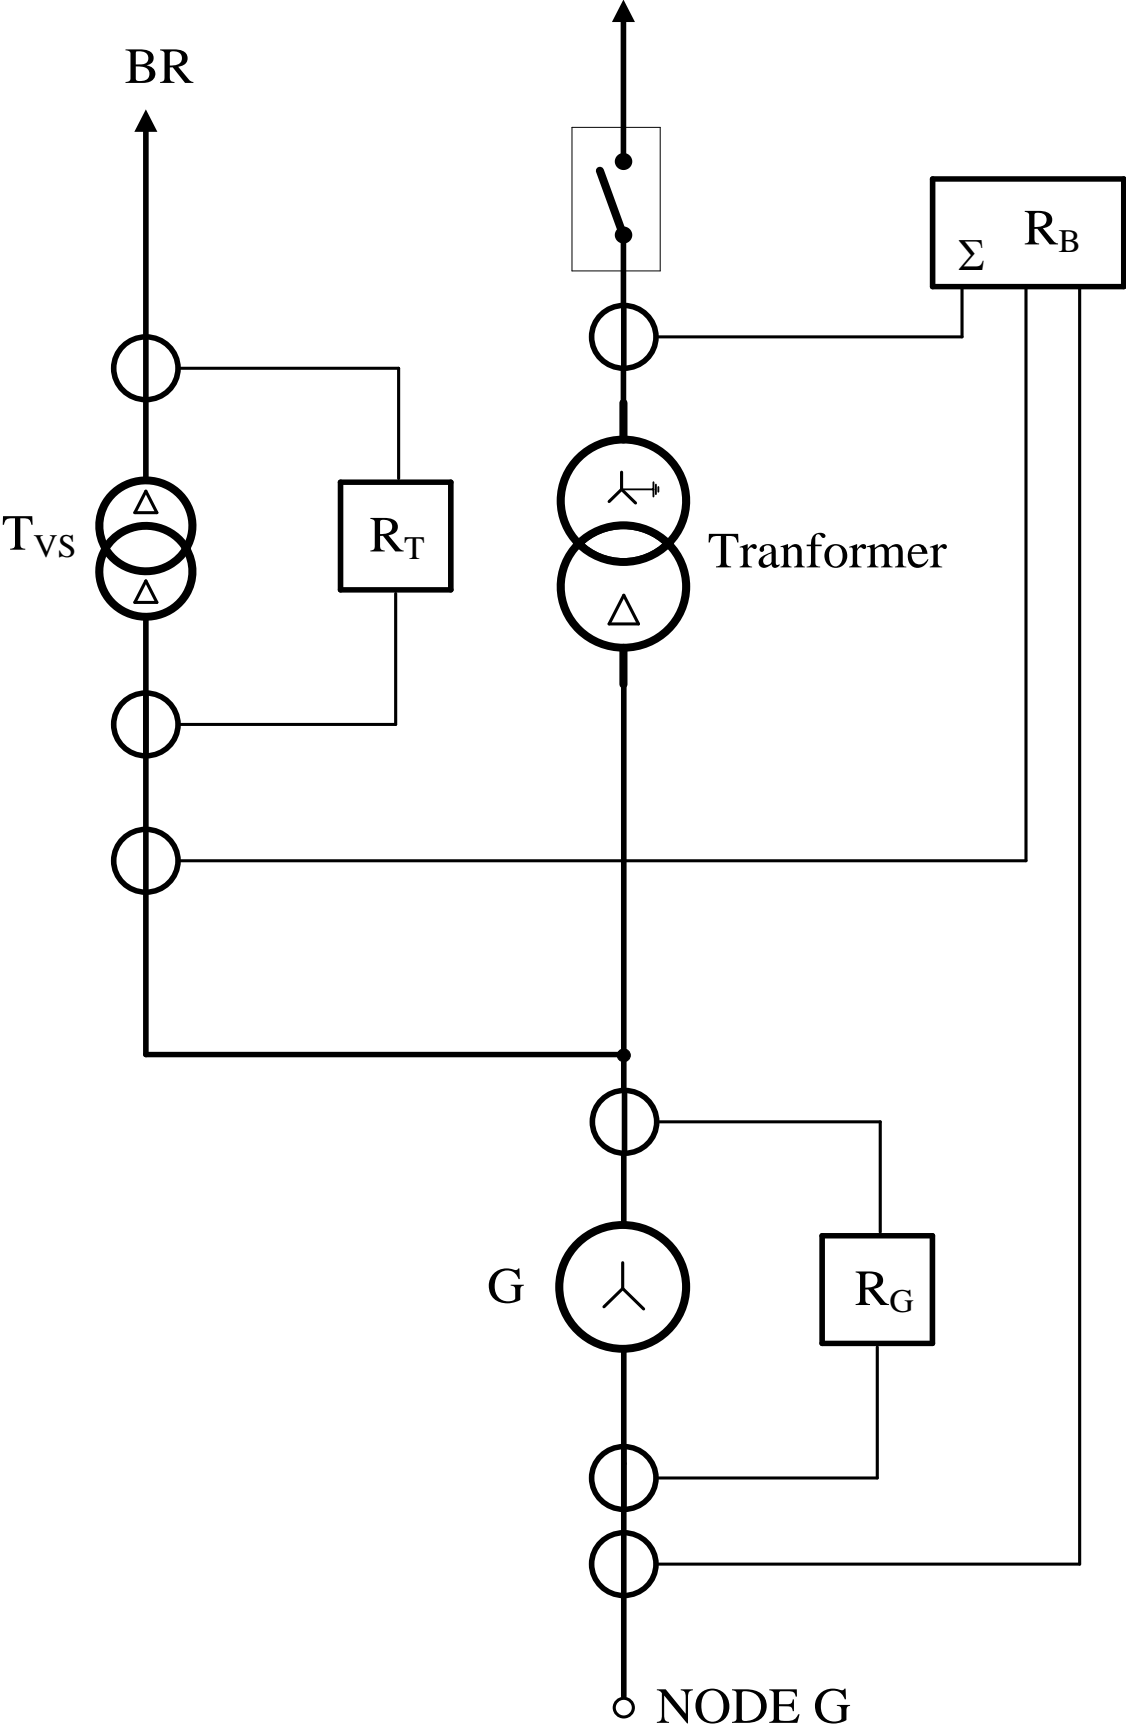

Cross DP – in case of fault  $I_1 \neq I_2$  and the protection acts

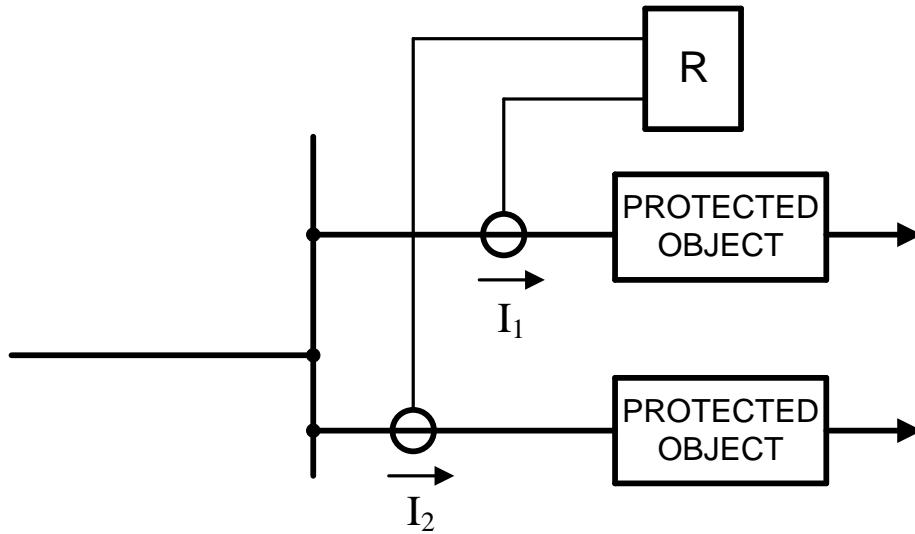


e.g. as the generator ring protection (stator winding of 2 parallel branches)

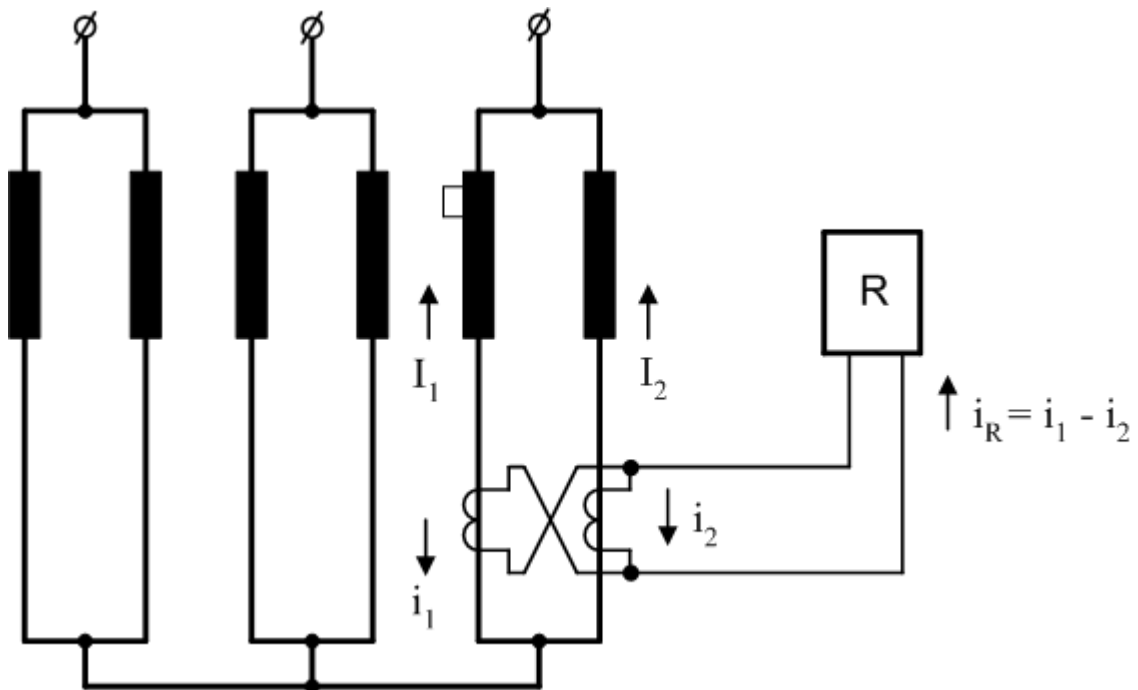

## Overcurrent short-circuit protection

- for identifying outside short-circuits, also as the DP backup for inside short-circuits
- distance (impedance) protection principal
- short-circuit distance distinguishing
- activity doesn't depend on the short-circuit current size (in time)

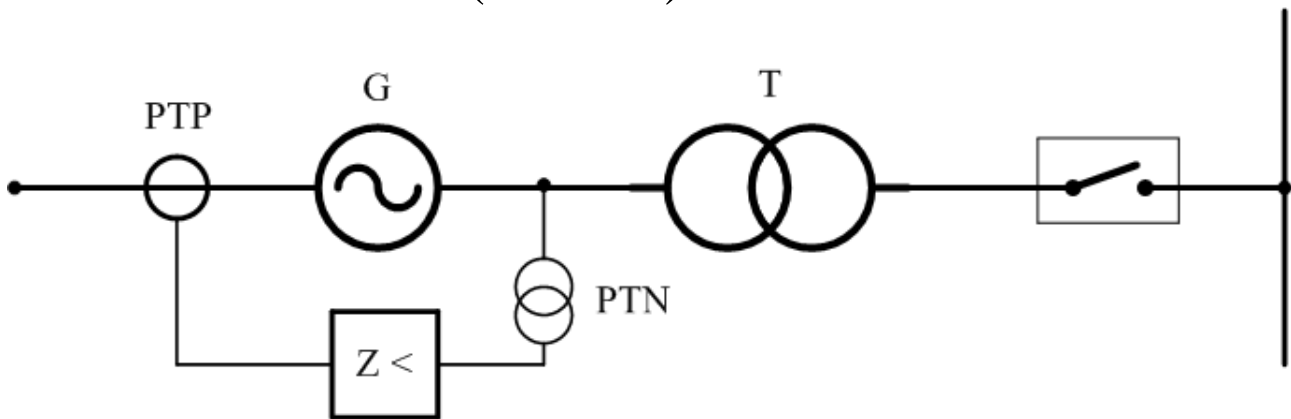


## Stator ground protection

Stator winding ground fault → neutral point moving → its voltage to ground (higher U if ground fault closer to machine terminals).  
Risks of unbalance, fault current, 2<sup>nd</sup> ground fault.


### *Voltage protection*

- GF identifying up to 95% winding (also more)
- neutral point or zero component voltage (artificial neutral point and open triangle)
- frequency element for 1<sup>st</sup> harmonic

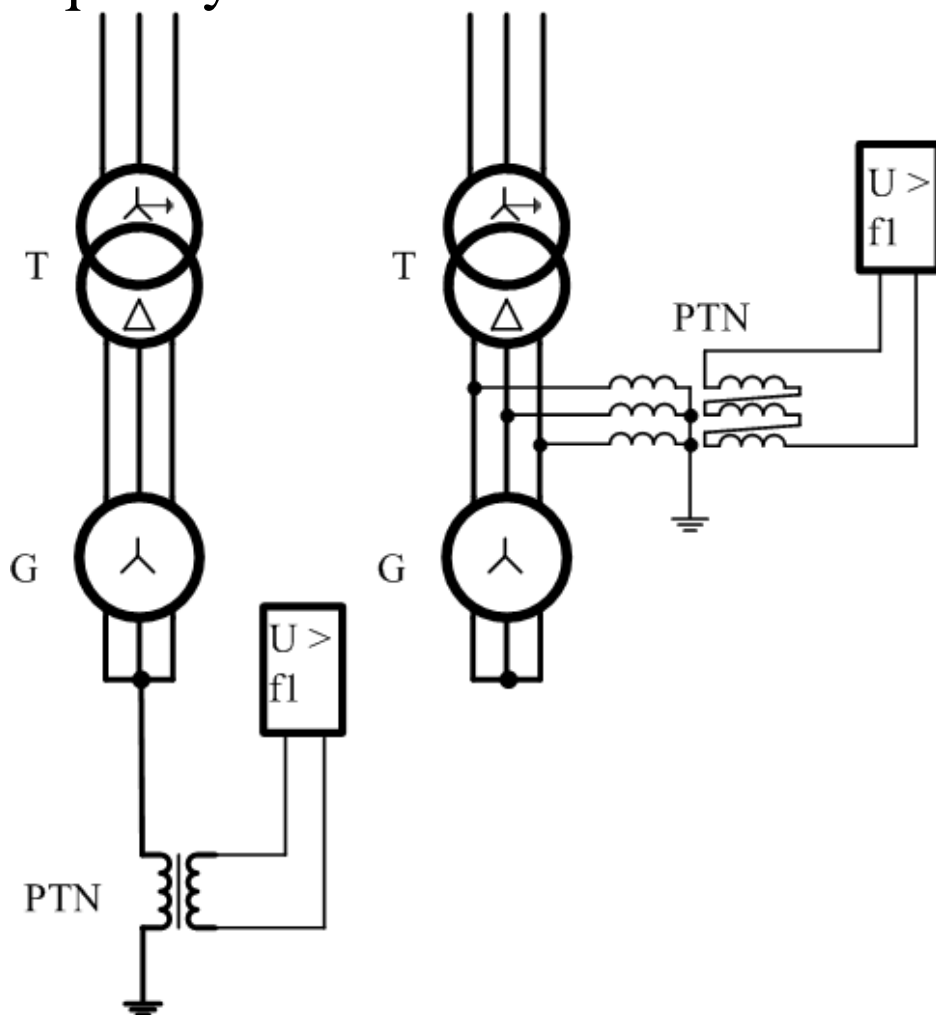

## *Current protection*


- resistance in the neutral point reduces ground current (plates burning-up)
- high R reduces protection range

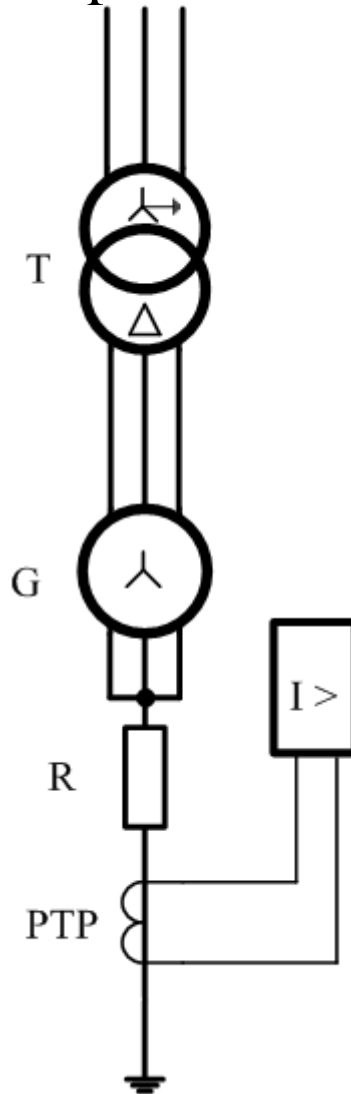


## **Rotor ground protection**

Current circuit interconnection in case of GF → switching-off. In case of 2<sup>nd</sup> GF mag. field deformation and radial mechanical forces.

## AC superposition

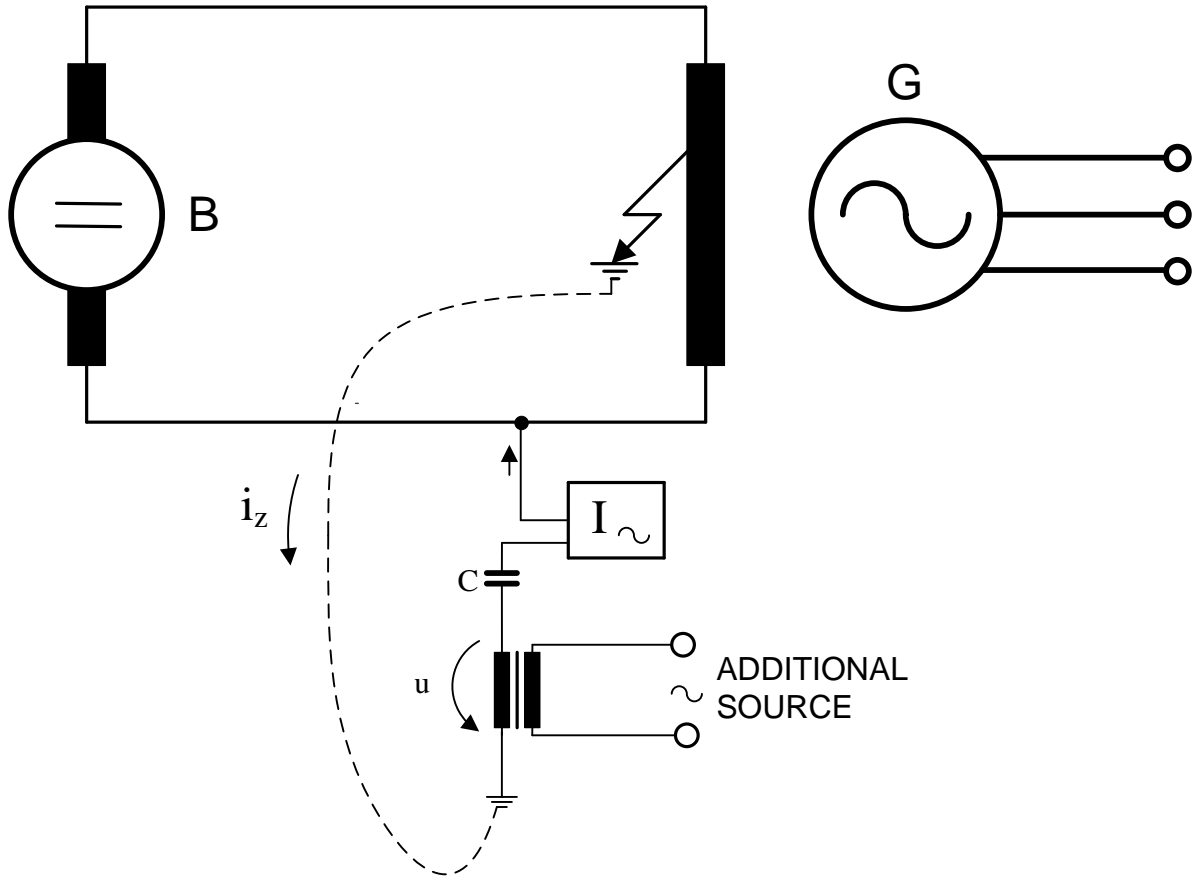

## DC superposition

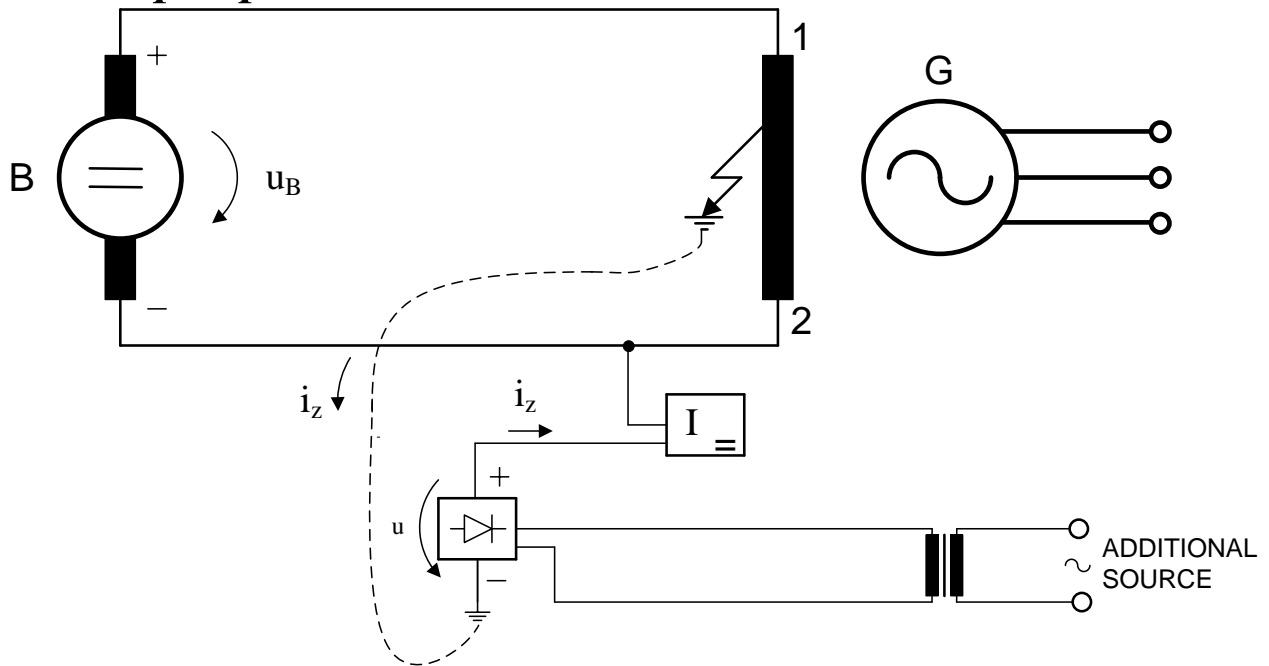



# Protections against abnormal operating states

## Protection against current overload

- protects against heating (ageing, insulation break-out)
- often independent with a longer time  $10 \times s$  (machine can endure short-time overload)

## Protection against overvoltage

- protects against relieving, regulator malfunction

## Protection against reverse power flow


- to prevent motor operation in case of turbine failure, watt

## Protection against unbalanced load

- unbalance  $\rightarrow$  reverse magnetic field in the stator  $\rightarrow$  eddy currents in the rotor and damper  $\rightarrow$  dangerous heating in corners, vibrations
- for the certain negative component value  $i_2$  there is a permitted operation time according to the machine heating curve
- limit according to coefficient  $K_{\max}$  by the producer

$$K(T) = \int_0^T i_2^2(t) dt$$

- multilevel protections, they measure  $i_2$  from three phases
- also as a backup for unbalanced short-circuits

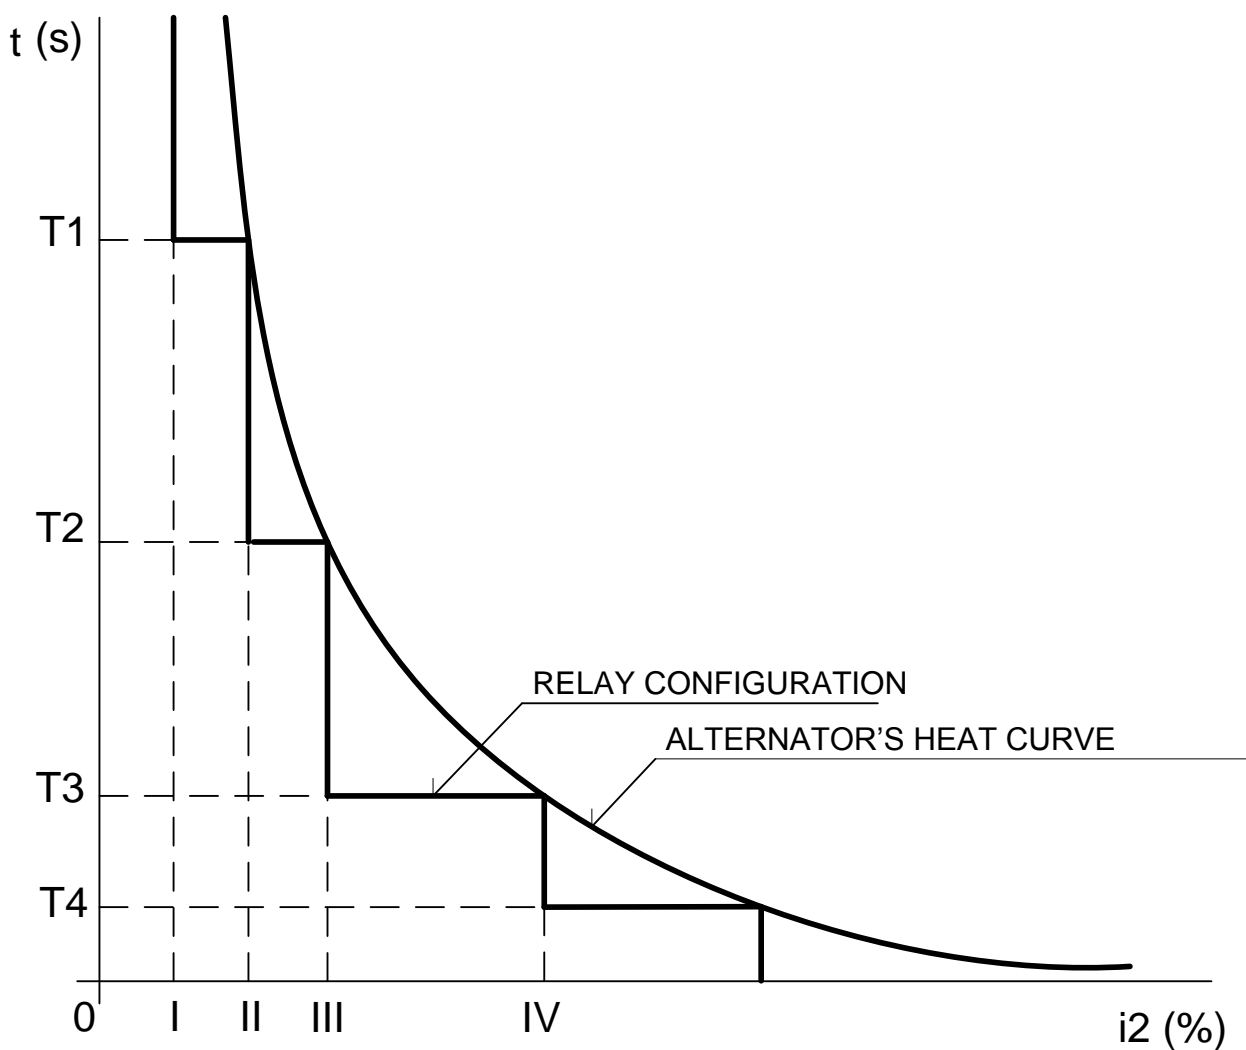

# Transformers protections

## Protections according to fault type


- A. Transit faults (outside influence) –  
overcurrent and short-circuit protection
  - 1) Overload
  - 2) Outside short-circuit
- B. Inside faults
  - a) Sudden – differential, gas relay, vessel (cage) protection
    - 1) Short-circuits on the terminals, winding
    - 2) Ground faults
  - b) Gradual – gas relay
    - 1) Wrong plates insulation → arcs in the vessel
    - 2) Cooling failures → bubbles in the oil

## **Differential protection**


Basic protection against inside failures.

Principal as at the generators but difficulties:


- a) unequal CT ratio – rated TRF currents but CT ratio normalized → incorrect activity during outside short-circuit

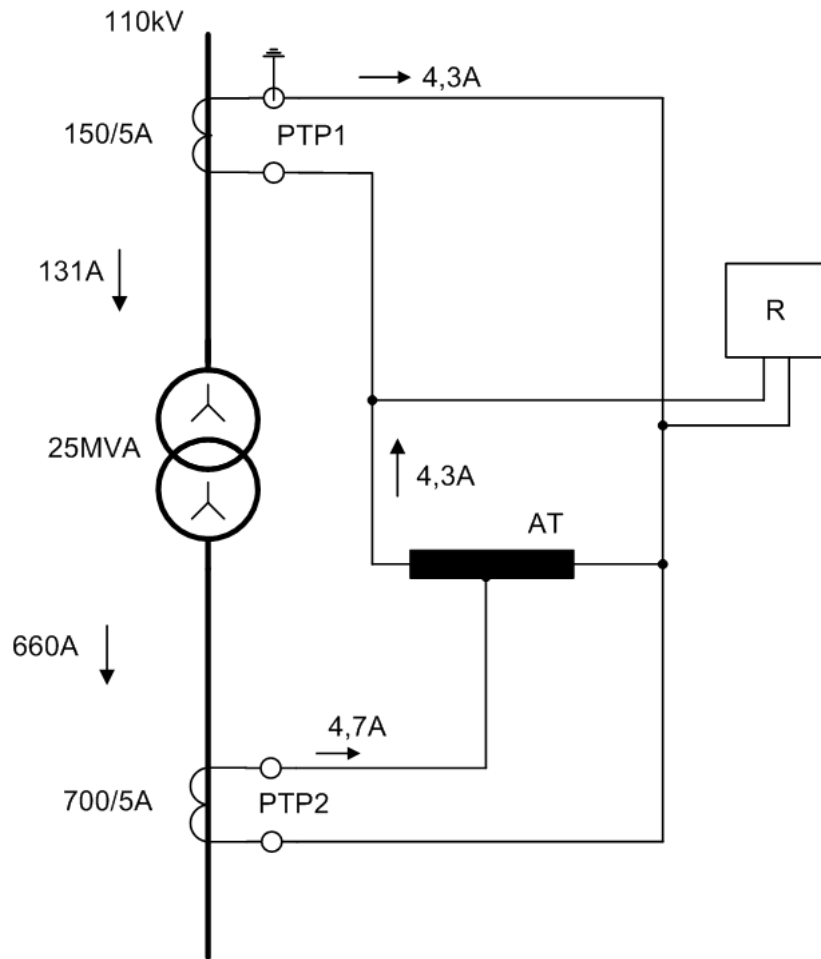

b) unequal CT construction – different overcurrent numbers

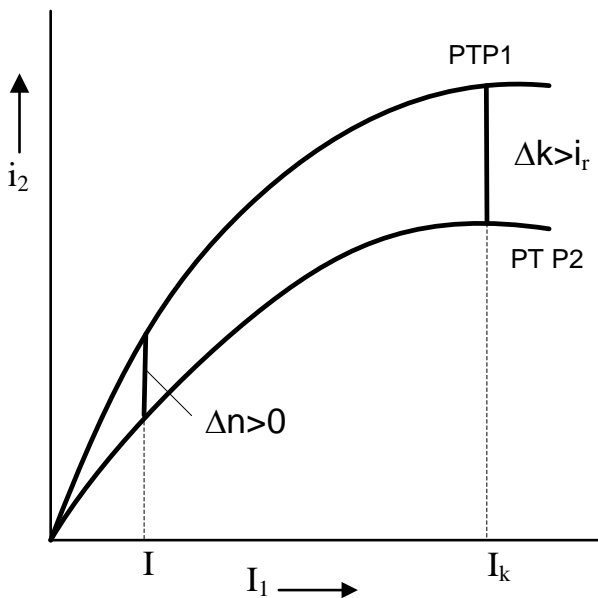

DIFFERENT OVERCURRENT NUMBERS PTP 1 A 2

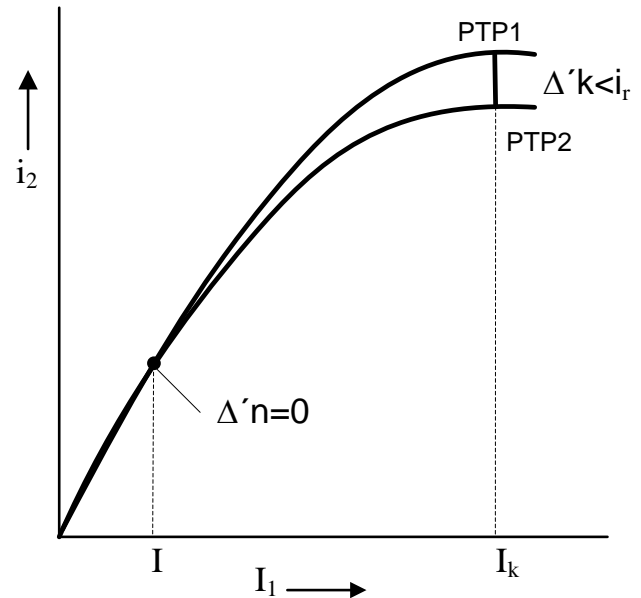

SAME OVERCURRENT NUMBERS PTP 1 A 2

- c) unequal primary and secondary winding connection → difference currents because of phasors turning → to connect CT windings as the opposite TRF winding (Y, D)
- d) magnetizing current impact during TRF switching-on with open circuit → 2<sup>nd</sup> harmonic filter
- e) voltage control at regulation TRF → higher DP start-up current


## Gas relay

At TRF with oil cooling, between cover and conserver.

2 levels:

- 1) Signalization (float P1)
- 2) Switching-off (float P2 + clack K)

Quick gas generation during short-circuit, oil leakage.

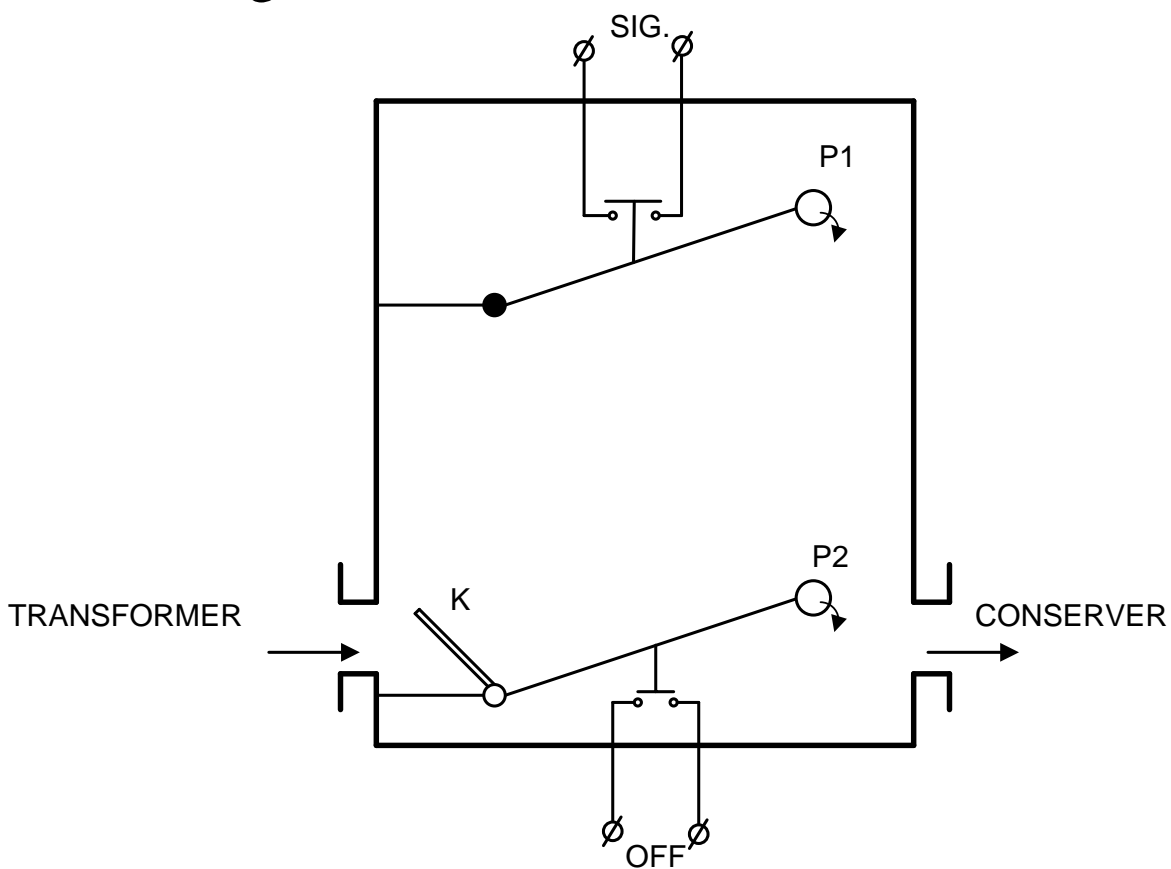

## Powerline protections

Against short-circuits, overload, ground fault.


Against short-circuits:

- overcurrent – simple powerlines (ev. with the directional element)
- comparison – node networks
- distance – node networks

### **Distance protections**

- measures powerline impedance ( $u/i$ ) from the protection to the short-circuit place
- switching-off time proportional to the impedance
- good selectivity
- collaboration with AR (auto-reclosing) system

# Switching-off characteristics

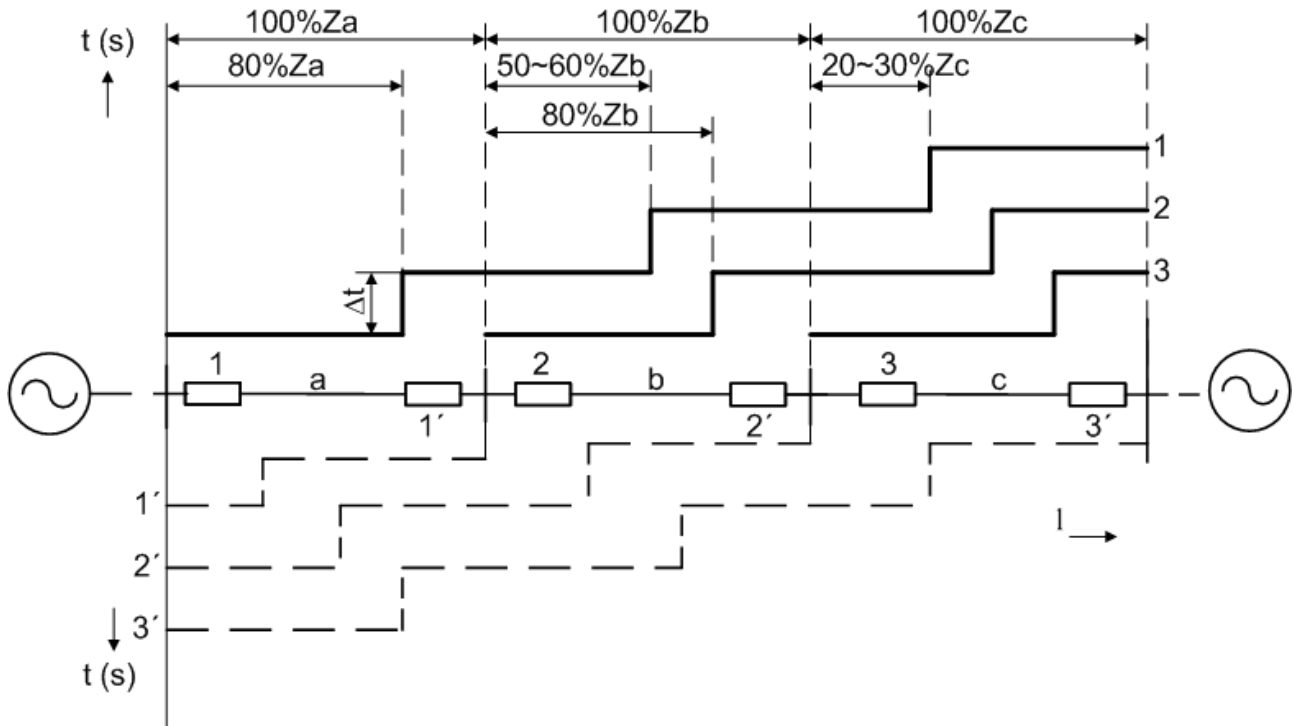



- 1<sup>st</sup> level:  $0,8 z_a$   
 $0,01 - 0,02$  s (momentary)
- 2<sup>nd</sup> level  $0,8(z_a + 0,8 z_b)$   
 $0,6$  s
- 3<sup>rd</sup> level  $0,8[z_a + 0,8(z_b + 0,8 z_c)]$   
 $1,1 - 1,2$  s

## Comparison protections

- compares el. values at the beginning and at the end (direction of I, P, Q, phase)
- identifies only values inequality
- disconnects immediately and only one powerline section → “sectional protection”



- auxiliary connection of both stations for the comparison purpose (telephone, hf on the powerline)
- collaboration with AR (auto-reclosing) system

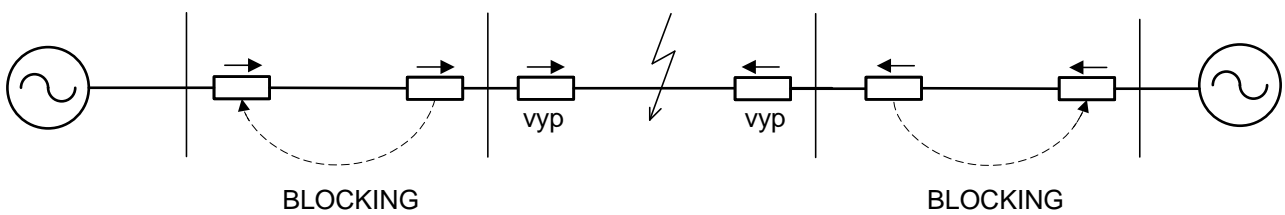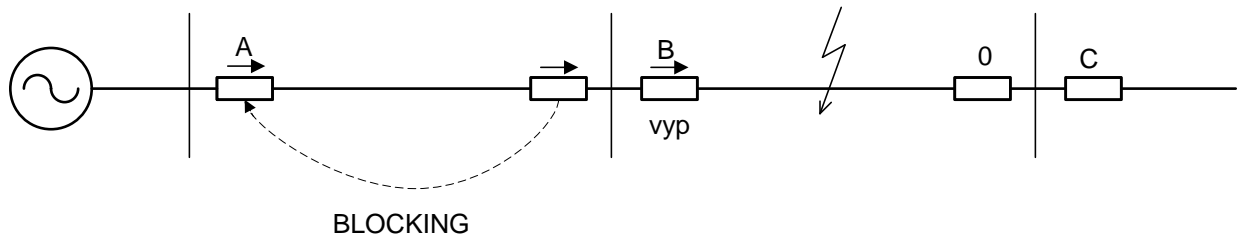

# Motors protection

## Asynchronous motors

Protections according to faults:

- 1) bearing failure – bearing temperature measuring
- 2) inside short-circuits – differential, current
- 3) ground fault – ground protection
- 4) overload – current dependent, start-up, thermal picture
- 5) unbalance – negative component measuring
- 6) undervoltage – contactor, undervoltage protection
- 7) one phase disconnecting

## Synchronous motors

AM + others:

- 8) start-up – asynchronous operation
- 9) protection against excitation loss – loss of synchronism danger (mechanical surges) → power angle monitoring
- 10) protection against reverse power flow

## DC motors

- 1) short-circuit protection – momentary, depends on commutation


- 2) protection against overload – current, dependent
- 3) loss of excitation – speed and stator current increase, undercurrent protection
- 4) ground protection
- 5) bearing protection

## Protections in LV distribution

### **Fuses**

- the oldest protective principal against overcurrents
- artificially made the weakest place in the circuit where the current flow is broken
- a calibrated wire (belt) is remelted
- remelting in the extinguishing environment (soft sand)
- (+) simplicity, reliability
- (-) necessary exchange after activity, possibility of remelting only in one phase (at 3ph consumers)
- they mustn't be repaired unprofessionally
- usage in LV, MV x not in HV
- normal (quick) and slow (delay for start-up current)

- time-current characteristic construction from heating curves for different overloads
- time-current char. is dependent

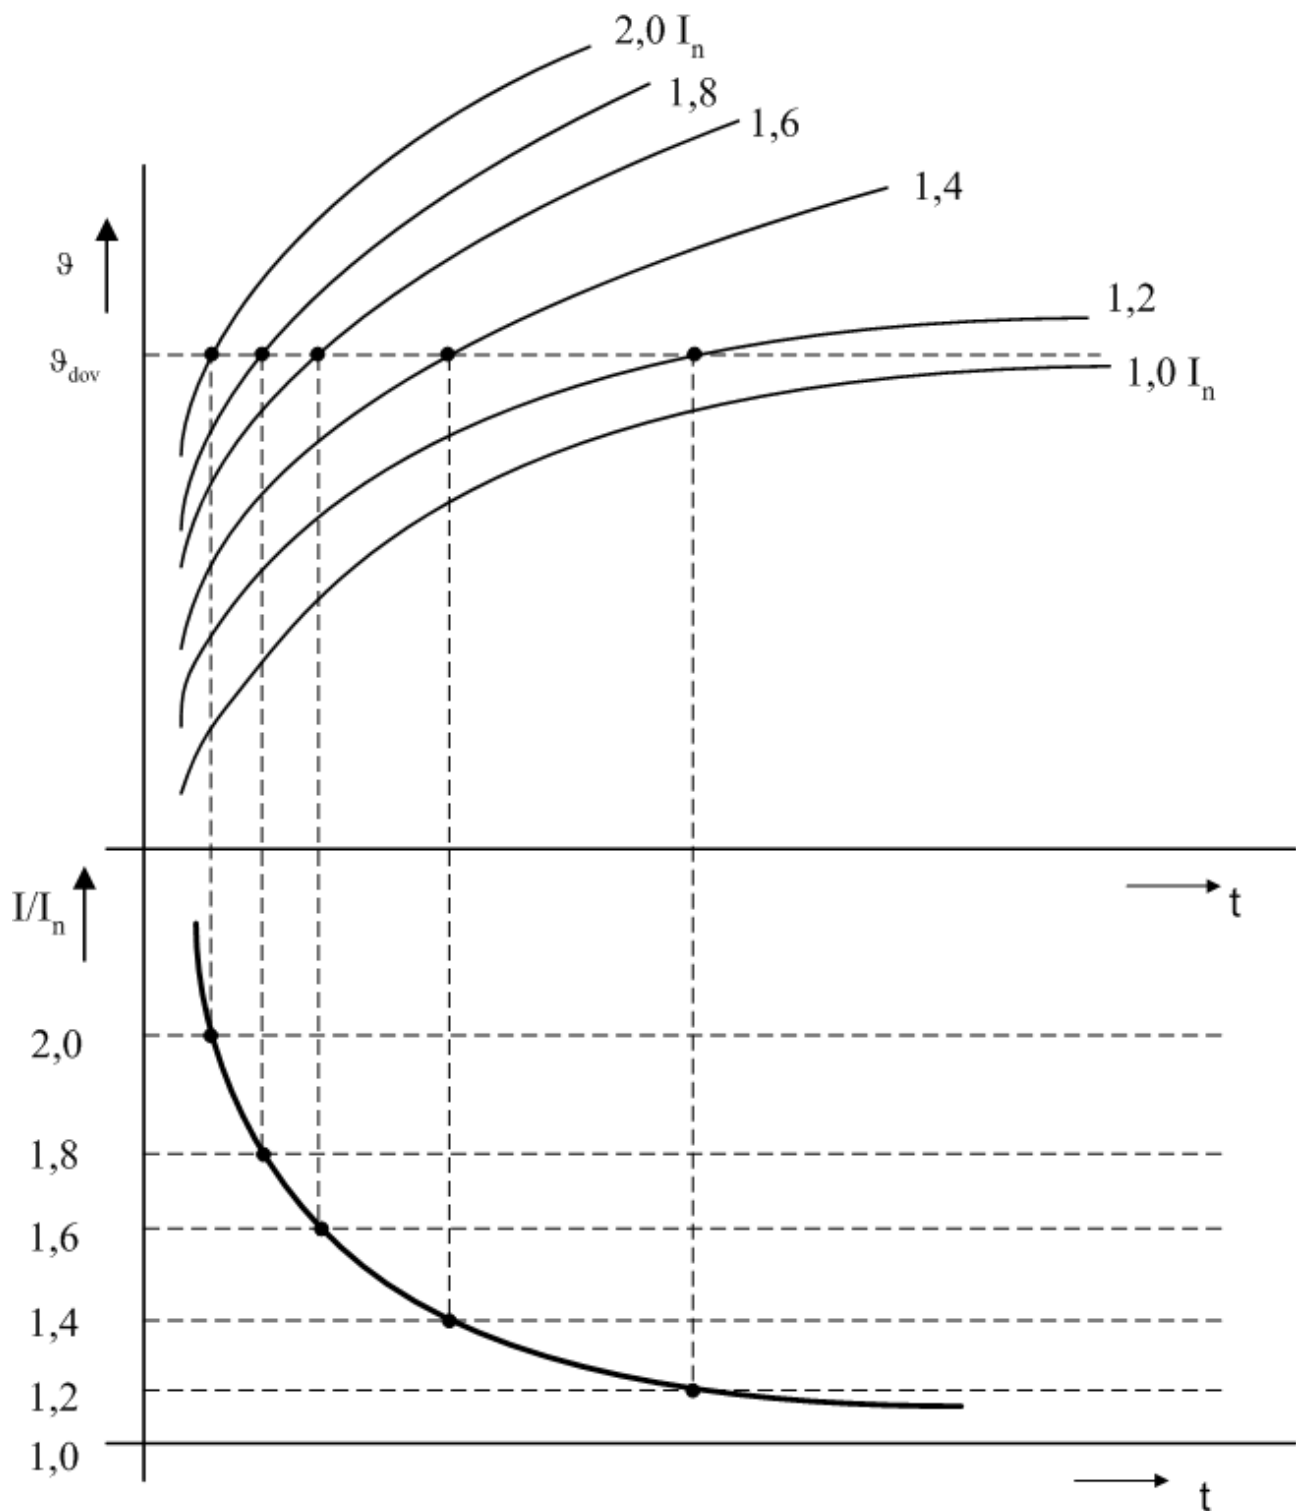


Time-current characteristic construction

## Fuses dividing according to the construction

- *screw-in* – lower currents
- *leg* – higher currents, quick → „power“
- *with contact flags* – very quick (x ms), limiting ability, for semiconductor elements
- *apparatuses* – weak glass tubes, fusible wire in the air
- *car* – ceramic cylinder
- *others* – belts, coils,...

## **Circuit-breakers**

- self-acting overcurrent breakers
- overcurrent (bimetal, overload) and short-circuit (electromagnet, short-circuits) release
- they switch off in the current zero, don't have limiting ability
- sometimes to add fuse for short-circuits if insufficient breaking capacity
- (+) repeatable function, multi-pole construction for 3ph consumers
- (-) complication, costs

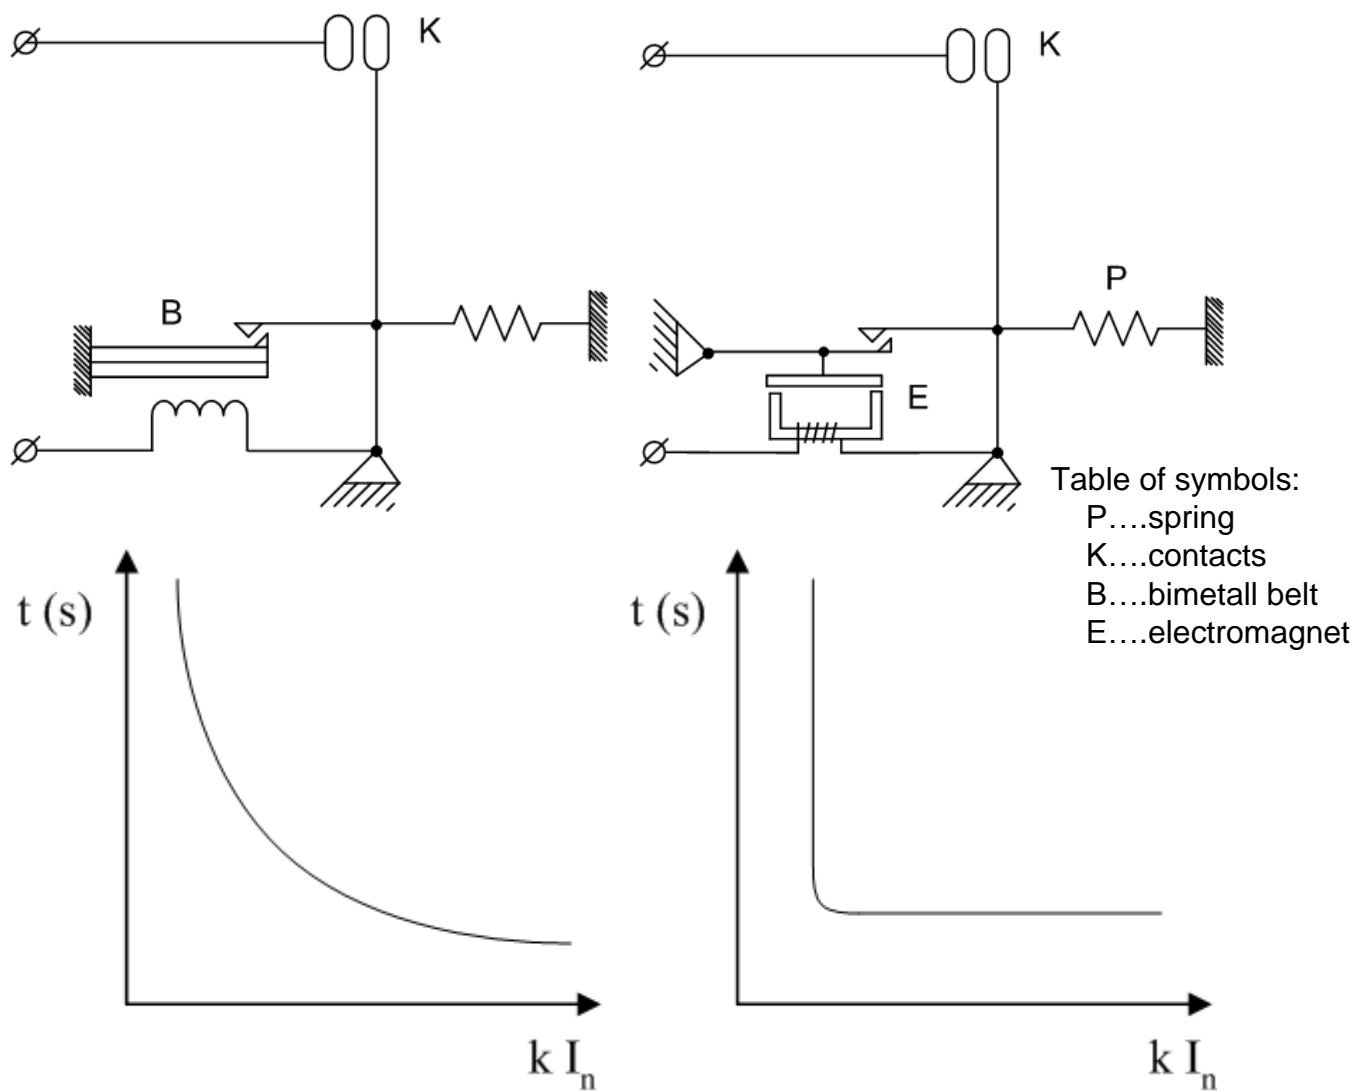

## Circuit-breakers dividing

- *size*  $I_n$  – small (to 25A, 500V AC, 250V DC), higher (over 25A, to 1000V AC, 1200V DC)
- *purpose* – for powerline, motor (delay for start-up), protective (with voltage release)
- *poles number* – 1 (1ph), 2 (DC), 3 (3ph), 4 (special)
- *contacts placing* – air, oil (only 3-pole, also for motors switching)

## **Protective overcurrent relays**

- protection against overload, 2-phase operation
- not against short-circuits (small breaking capacity)
- often collaboration with contactor (disconnects power circuit or only contactor coil)
- adjustable current release ( $\pm 20\% I_n$ )
- dependent time-current char.


## **Protectors**

- self-acting failure disconnecting in a very short time
- in places with a higher accident danger (recommendation or prescription)
- additional protection against danger contacts

## **Current protector**

- currents sum of all operating conductors
- during the failure  $\sum i \neq 0$  (summation transformer)
- residual current trips a relay, all operating conductors are disconnected

- disconnecting caused by tripping residual current (e.g. 50%  $I_{\Delta n}$ )
- $I_{\Delta n} = 15, 30, 100, \dots$  mA
- testing button
- sometimes with implemented circuit-breaker against overload

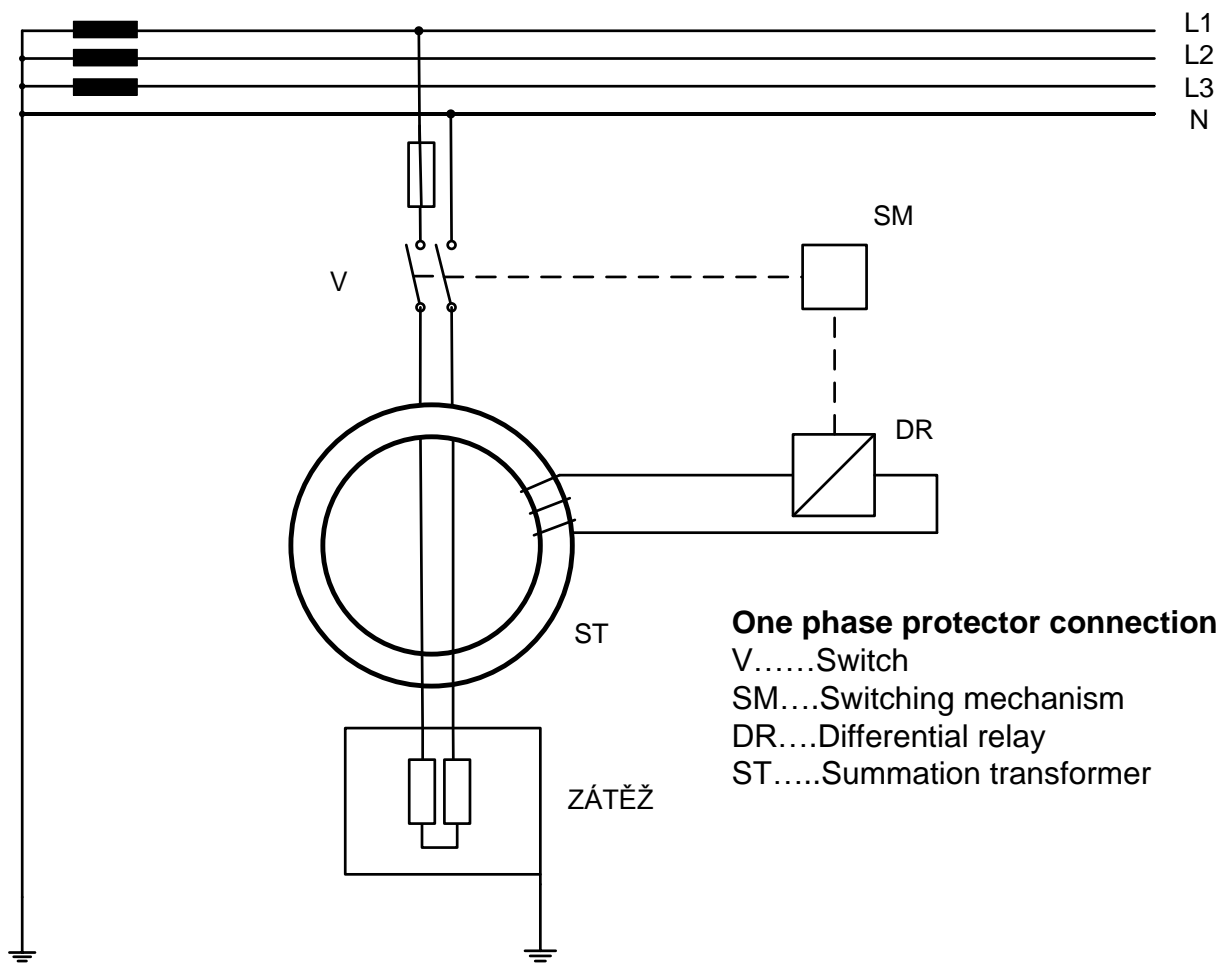



## Voltage protector

- grounded switching-off coil to the chassis ground
- it disconnects at adjusted voltage (permitted touch voltage)
- it disconnects all operating conductors (also neutral conductor) → 2-pole, 4-pole

